


KATALOG - WYMIAROWANIE I PARAMETRY KRÓCCY

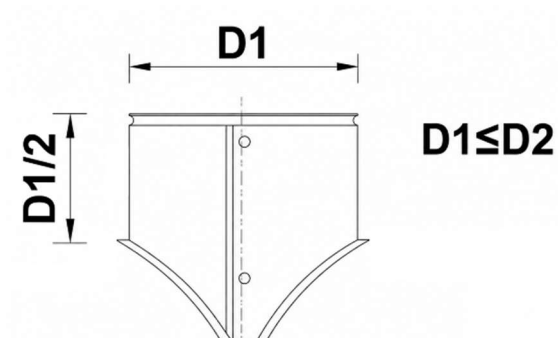

średnica zewn. D1 [mm]	długość króćca D1/2	U - zakład obwodowy	wywiniecie
90	45	15	15
100	50	15	15
110	55	15	15
120	60	15	15
130	65	15	15
140	70	15	15
150	75	15	15
160	80	15	15
170	85	15	15
180	90	15	15
190	95	15	15
200	100	15	15
210	105	15	15
220	110	15	15
230	115	15	15
240	120	15	15
250	125	15	15
260	130	15	15
270	135	15	15
280	140	15	15
290	145	15	15
300	150	15	15
310	155	15	20
320	160	15	20
330	165	15	20
340	170	15	20
350	175	15	20
360	180	15	20

370	185	15	20
380	190	15	20
390	195	15	20
400	200	15	20
410	205	15	20
420	210	15	20
430	215	15	20
440	220	15	20
450	225	15	20
460	230	15	20
470	235	15	20
480	240	15	20
490	245	15	20
500	250	15	20
510	255	20	20
520	260	20	20
530	265	20	20
540	270	20	20
550	275	20	20
560	280	20	20
570	285	20	20
580	290	20	20
590	295	20	20
600	300	20	20
610	305	20	20
620	310	20	20
630	315	20	20
640	320	20	20
650	325	20	20
660	330	20	20
670	335	20	20
680	340	20	20
690	345	20	20
700	350	20	20
710	355	20	20
720	360	20	20
730	365	20	20
740	370	20	20
750	375	20	20
760	380	20	20
770	385	20	20
780	390	20	20
790	395	20	20
800	400	20	20